Product Information

Serial No.	Model No.	Description	Pool Volume	Flowrate
88390201	EMD-11C	S500 Sand Filter, SS050 Pump, CL-01A Chlorine Feeder and PSB016 Submersible Pump	66m ³	11m ³ /h
88390202	EMD-11CP	S500 Sand Filter, SS050 Pump, CL-01A Chlorine Feeder, SR30 Booster Pump and PSB016 Submersible Pump	66m ³	11m ³ /h
88390301	EMD-14C	S650 Sand Filter, SS100 Pump, CL-01A Chlorine Feeder and PSB016 Submersible Pump	84m ³	14m ³ /h
88390302	EMD-14CP	S650 Sand Filter, SS100 Pump, CL-01A Chlorine Feeder, SR30 Booster Pump and PSB016 Submersible Pump	84m ³	14m ³ /h
88390401	EMD-18C	S700 Sand Filter, SC150 Pump, CL-01A Chlorine Feeder and PSB016 Submersible Pump	108m ³	18m ³ /h
88390402	EMD-18CP	S700 Sand Filter, SC150 Pump, CL-01A Chlorine Feeder, SR30 Booster Pump and PSB016 Submersible Pump	108m ³	18m ³ /h
88390601	EMD-25C	S800 Sand Filter, SB20 Pump, CL-01A Chlorine Feeder and PSB016 Submersible Pump	150m ³	25m ³ /h
88390602	EMD-25CP	S800 Sand Filter, SB20 Pump, CL-01A Chlorine Feeder, SR30 Booster Pump and PSB016 Submersible Pump	150m ³	25m ³ /h
88390701	EMD-32C	S900 Sand Filter, SB30 Pump, CL-01A Chlorine Feeder and PSB016 Submersible Pump	192m ³	32m ³ /h
88390702	EMD-32CP	S900 Sand Filter, SB30 Pump, CL-01A Chlorine Feeder, SR30 Booster Pump and PSB016 Submersible Pump	192m ³	32m ³ /h



EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: Flat A-D, 20/F., Kai Bo 22, 22 Wing Kin Road, Kwai Chung, Hong Kong PHONE +852 2832 9880 www.emauxgroup.com

♦ YOUR PREMIER SUPPLIER

Available from:

EMD Series In-ground Filter System


SIMPLE OPERATION WITH CONTROL BOX

Easy installation with pre-installed plumbing and durable, weatherproof enclosure



www.emauxgroup.com

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE © 2021 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVE





Pool & Spa Equipment

Filtration System EMD SERIES

ADVANTAGES OF EMD SYSTEM

The Enclosure

- 1. Made from durable, corrosion resistant fiberglass reinforced plastic. Withstands UV and low temperature
- 2. Watertight and equipped with a submersible pump to drain water automatically
- 3. The filter systems are suitable for all kinds of pool shapes and sizes, and can be customized to your specific requirements.
- 4. Simple installation can be completed in just a few hours

Timer-controlled Automation

- 1. Eliminates the needs for manual power on/off and professional staff for maintenance
- 2. Convenient and user-friendly

The Content

- 1. The system consists of a subsystem for filtration, hydraulic massage, sanitizing and lighting
- 2. Service Lights installed on the corner will turn on automatically when the cover is open
- 3. It can be equipped with salt water chlorinator which is the most effective and widely used means for sanitization




Product Features

Max Working Pressure 36psi/2.5bar Max Water Temperature 43°C (109°F) Suggested Size Of Media 0.5-0.8mm control box

circulation pump

booster pump


Product Dimensions












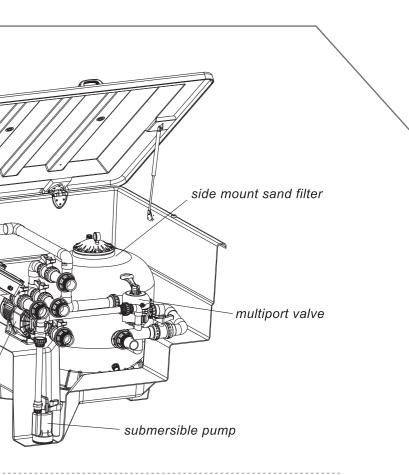

del	A mm	B mm	C mm	D mm
D-11	1330	1055	905	1210
D-14	1330	1055	905	1210
D-18	1400	1220	1080	1340
D-25	1730	1315	1170	1630
)-32	1730	1315	1170	1630

