Hydrau-Power Commercial Pump

EXCELLENT HYDRAULIC EFFICIENCY UP TO 91%

For commercial pools, aquatic parks, and seawater facilities





Product Features



EXCELLENT RESISTANCE TO SEAWATER CORROSION

The Emaux Hydrau-Power pump is a series of powerful and robust pumps engineered for applications requiring high flow capability and efficiency. The pump is constructed with high impact corrosion resistant thermoplastics and equipped with a large capacity strainer. The Hydrau-Power pump is suitable for a variety of applications including all types of commercial pools, aquatic parks, and seawater facilities.



13L/30L Strainer Basket



Francis-Vane Impeller




IE 3 Class Motor

Product Features

- 1. High volume self-priming thermoplastic pump ideal for large filtration system
- 2. Proven hydraulic efficiency up to 91%
- 3. Premium Efficiency IE3 Class Motor (compliance IEC 60034-30)
- 4. Francis-vane impeller allows for broadband efficiency and large flow range.
- 5. Smooth throat volute design facilitates the high work efficiency
- 6. The operating frequency can be controlled externally by Variable Frequency Drive (VFD)
- 7. Fiber reinforced plastic casing provides substantial temperature, pressure, vibration and impact performance.
- 8. Secondary seal chamber as the water leakage and vapour blocker to the motor.
- 9. Large suction-side detachable strainer capacity in 13 and 30 Liter.
- 10. Low noise level up to 68dB
- 11. IPX5 Waterproof Standard



Physical Structure

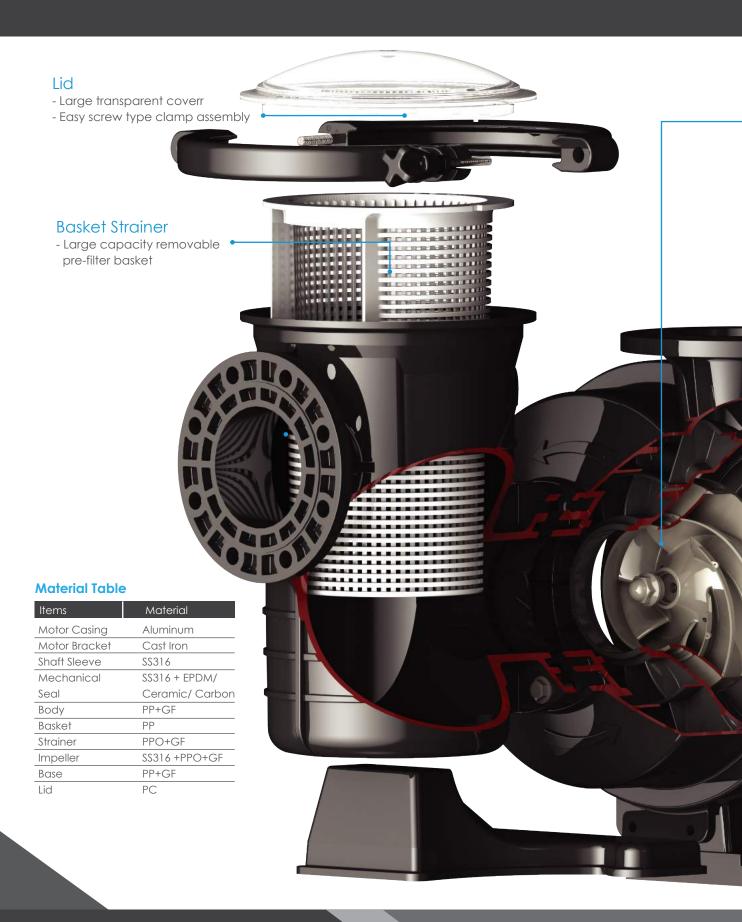

Impeller

- Francis vane design allows for broadband efficiency and large flow range.
- Expertly machined and dynamically balanced before assembly.
- Integrated reverse-fastening threads insert molding.

Mechanical Seal

- Self-lubricating mechanical seal prevents liquid seepage.
- Carbon face rotating against a stationary O-ring seat provides positive sealing up to full design pressure.

Shaft Sleeve

- Corrosion resistant 316 stainless steel, ground and polished to a smooth external surface
- Non IEC Extended shaft design

Motor

- B5 type front end flange design for easy assembly
- Corrosion resistant PU coating

Base

- Extended support surface area
- Detachable design for environmental fitting.
- Elastic material absorbs vibration and impact providing a stable system.

Product Information


Specification


Motor	Premium Efficiency IE3 Class Motor	Water Pr
Working Voltage	380Vac 50Hz, 3 Phase 400/690Vac 50Hz, 3 phase* 400/690Vac 60Hz, 3 phase*	Flow Ra
Design Methodology	Advanced computer 3D design modeling for CFD analysis	Different Head
Design Reference (Applicable only)	ISO 5199 : 2002	Speed
Operating Pressure	0-2 bar 25°C to 35°C	Insulation Systen
Temperature Range	0°C to 45°C (Water) 0°C to 45°C (Ambient)	Flang Standa

Water Proof	IP55
Flow Rate	Up to 280m³/h
Differential Head	Up to 22m
Speed	2 pole up to 2850 rpm 4 pole up to 1450 rpm
Insulation System	Class F
Flange Standard	DIN (PN10) ANSI (Class150)

Product Dimension

APS550P/APS750P

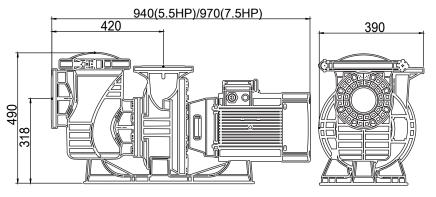

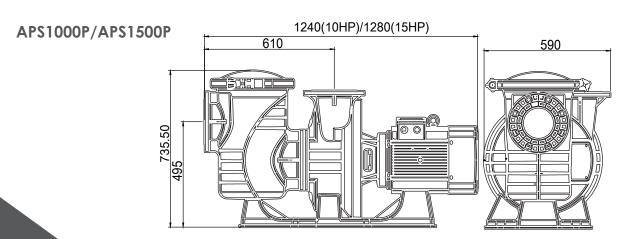



Self-Priming Pump: APS550P, APS750P Centrifugal Pump: APS1000P and ASP1500P

^{*} Under development

	Model	Connection Size ANSI / DIN	Horsepower (hp)	Strainer Vol (L)	RPM	Power (kW)	Noise (dB)	Head (m)					
Code 380V/50Hz								6	8	10	12	14	16
300 V/301 IZ		ANOI7 DIN	(116)	VOI (L)		(KVV)	(dD)	Flow Rate (m³/h)					
9023901	APS550P	4"/DN100	5.5	13	2850	4	72	95	90	82	75	65	50
9023902	APS750P	4"/DN100	7.5	13	2850	5.5	72	130	120	110	105	90	80
9023903	APS1000P	6"/DN150	10	30	1450	7.5	68		210	185	180	160	135
9023904	APS1500P	6"/DN150	15	30	1450	11	68		270	260	250	240	210

Technical Information

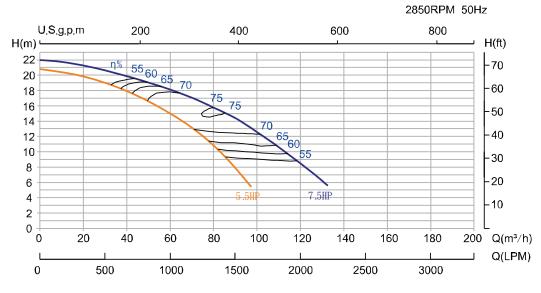

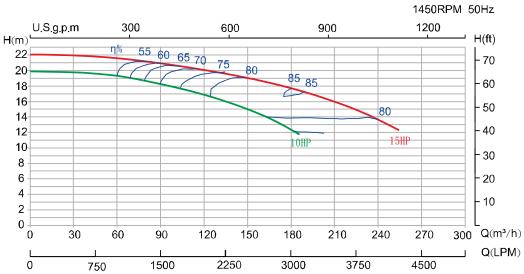

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: Flat A-D, 20/F., Kai Bo 22, 22 Wing Kin Road,

Kwai Chung, Hong Kong PHONE +852 2832 9880 www.emauxgroup.com



Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

© 2021 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.