




# ***INNOVATIVE ULTRA SLIM STYLE AND CUTTING-EDGE ILLUMINATION***

**Ultra Slim LED Light**

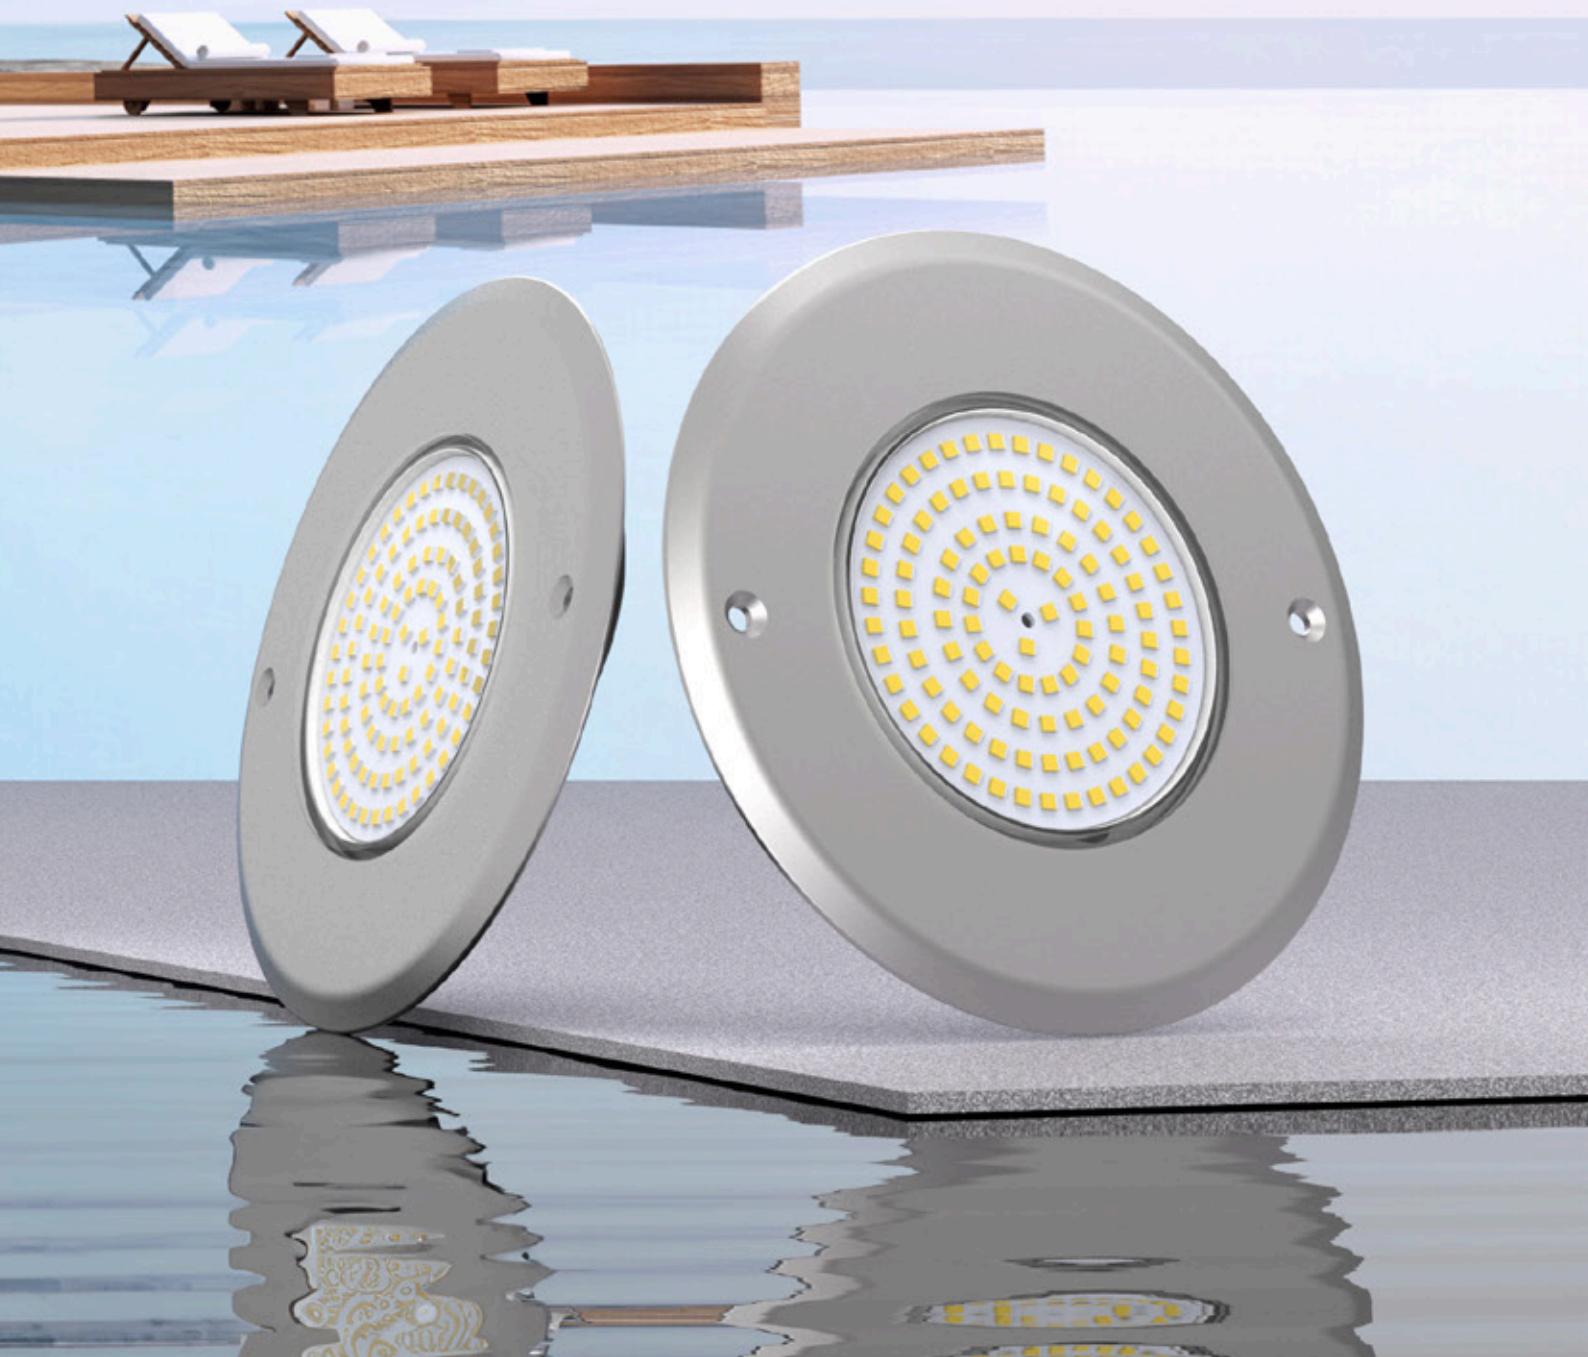

# INNOVATIVE ULTRA SLIM STYLE AND CUTTING-EDGE ILLUMINATION

Elevate your swimming experience with our cutting-edge ultra-thin pool lights! The Ultra Slim LED Light offers a sleek and elegant lighting solution that seamlessly integrates into your pool environment. Crafted from high-quality AISI-316 stainless steel, these lights are not only stylish but also easy to install and maintain.

With an impressive thickness of just 8 mm, our Ultra Slim LED lights blend effortlessly into your pool walls. Made from durable PC plastic, these lights are resistant to water and chemicals, ensuring longevity and exceptional value.



IP68 CE



Waterproof Standard

IP68

Cable

2.5m

Material

Stainless Steel Face Ring  
Plastic Housing

Installation

Wall mounted (Housing type)

Color



RGB




LED  
Warm White




LED  
Cool White

## PRODUCT FEATURE

- 1. Ultra-thin design** in 8 mm thickness.
- 2. The AISI-316 stainless steel** body ensures optimum corrosion resistance.
- 3. 100% Water Proofing** with our latest resin filled LED panel technology, the unit is totally waterproof.
- 4. Convenience** easy installation and maintenance.
- 5. Extremely energy-saving** and **Environmentally Friendly**.
- 6. LED life** exceeds 40,000 hours.

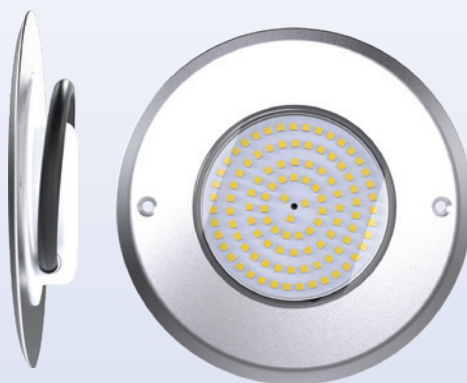

## Power Supply

Code	Model	Power	Input Voltage	Output Voltage	Photo
50928011	PV-12036	35W	AC220V	DC12V	
50928012	PV-12060S	60W	AC220V	DC12V	
50928013	PV-12100S	100W	AC220V	DC12V	
50928014	PV-12150S	150W	AC220V	DC12V	

## Controller for RGB Lights



**Code:** 50922030

**Model:** D015

**Input power:** DC12-24V

**Max.Output:** 3x5A / 3x60 Watt

**RF frequency:** 2.4GHz/

Tuya APP Control

## Remote Controller



**Code:** 50922031

**Model:** HX-RFBK-RGB-2.4G


**Powered by:** DC3V

**RF frequency:** 2.4GHz


**RF distance:** 20M

8 dynamic modes


## Installation

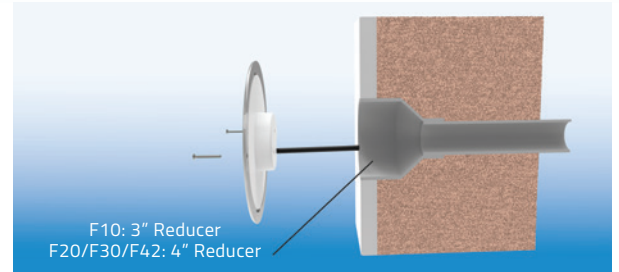


## Color Temperature

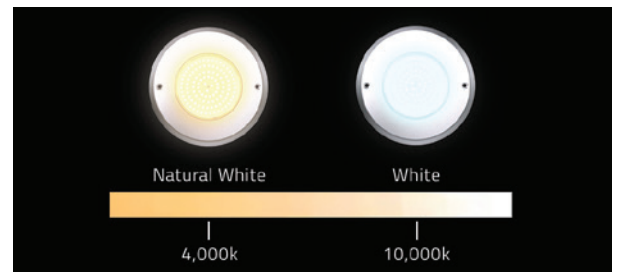

## Angle and Distance of Illumination

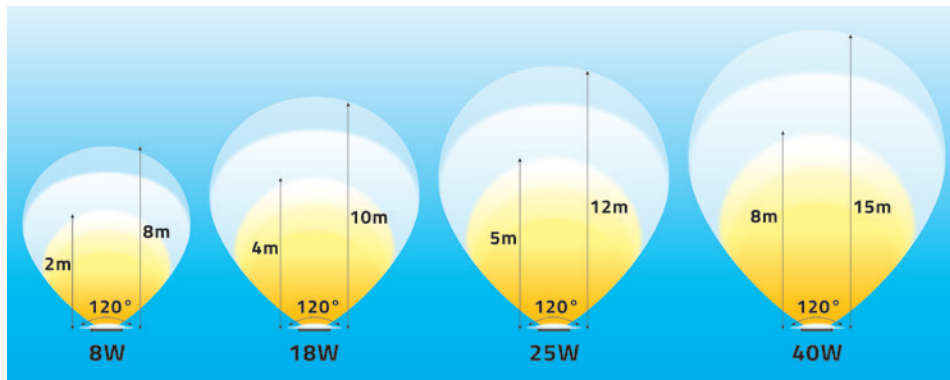

## Product Dimensions

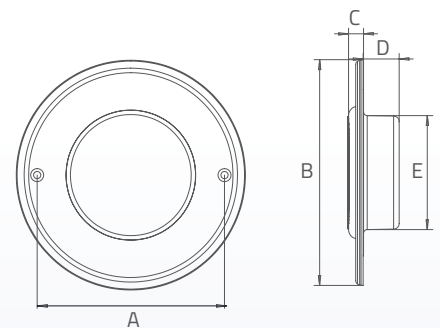

## Product Information

Code	Model	Watt/ Voltage	Color	luminous Flux (lm)	LED Bulb	Face ring	A mm	B mm	C mm	D mm	E mm
9043104	EL-F10-CW	8W/12V AC/DC	Cool White (10000k)	550	63 LEDs Bulb	316SS	105	120	8	19	65
9043105	EL-F10-WW	8W/12V AC/DC	Warm White (4000k)	550	63 LEDs Bulb	316SS	105	120	8	19	65
9043106	EL-F10-RGB	8W/12V DC	RGB	550	63 LEDs Bulb	316SS	105	120	8	19	65
9043107	EL-F20-CW	18W/12V AC/DC	Cool White (10000k)	1150	252 LEDs Bulb	316SS	208	230	8	24	84
9043108	EL-F20-WW	18W/12V AC/DC	Warm White (4000k)	1150	252 LEDs Bulb	316SS	208	230	8	24	84
9043109	EL-F20-RGB	18W/12V DC	RGB	1150	252 LEDs Bulb	316SS	208	230	8	24	84
9043110	EL-F30-CW	25W/12V AC/DC	Cool White (10000k)	1450	324 LEDs Bulb	316SS	208	230	8	24	84
9043111	EL-F30-WW	25W/12V AC/DC	Warm White (4000k)	1450	324 LEDs Bulb	316SS	208	230	8	24	84
9043112	EL-F30-RGB	25W/12V DC	RGB	1450	324 LEDs Bulb	316SS	208	230	8	24	84
9043113	EL-F42-CW	40W/12V AC/DC	Cool White (10000k)	1650	522 LEDs Bulb	316SS	240	280	8	24	84
9043114	EL-F42-WW	40W/12V AC/DC	Warm White (4000k)	1650	522 LEDs Bulb	316SS	240	280	8	24	84
9043115	EL-F42-RGB	40W/12V DC	RGB	1650	522 LEDs Bulb	316SS	240	280	8	24	84

Note: For Cool White/Warm White, a DC Power supply or AC Transformer must be ordered separately or provided by the customer;  
The RGB Control box must be ordered separately or provided by yourself.





**EMAUX WATER TECHNOLOGY CO., LTD**

ADDRESS: 2/F, Lockhart Centre, No. 301-307 Lockhart Road,  
Wanchai, HK

PHONE +852 2832 9880

[www.emauxgroup.com](http://www.emauxgroup.com)

 **YOUR PREMIER SUPPLIER**

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.  
© EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.