

E-Power Pump

HIGH PERFORMANCE & HEAVY DUTY
For residential and semi-commercial pools



 **Emaux**
water technology



SAA



Pool & Spa Equipment

Product Features

- 1) Asynchronous, two-pole motor
- 2) Class insulation: 130(B)
- 3) IPX5 Waterproof standard
- 4) Built-in thermal protection
- 5) Overload protection
- 6) Available in 50Hz or 60Hz for 220V/380V
- 7) Special designed unions compatible for both imperial and metric measurement standards
- 8) Imperial and Metric measurement standard
- 9) 316 Stainless steel shaft
- 10) 316 Stainless steel mechanical seal
- 11) Self-Priming up to 2.5m above water level
- 12) Testing pressure 50 PSI (3.5 Bar)
- 13) Basket Volume 5 litres


**Ring lock seal design eliminates suction leaks
and maximizes suction efficiency**



A High-Performing Self-Priming Pump





Technical Information

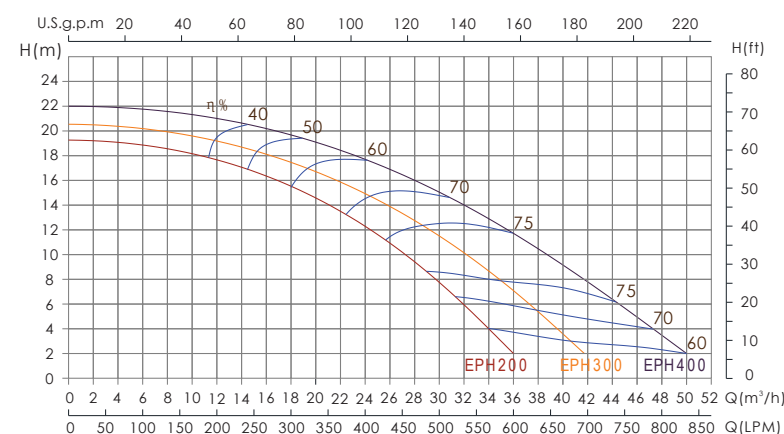

Model 50Hz	Input (kW)	Current (AMP)	Noise (dB)	Head (m)					
				6	8	10	12	14	16
				Flow Rate (m³/h)					
EPH200	1.8	8.2	68	32	30	27	24	21	17
EPH300	2.2	10.0	69	37	35	32	29	26	22
EPH400	2.8	12.5	71	45	42	39	36	32	28

Code 230V/50Hz	Code 230V/60Hz	Code 400V/50Hz	Model	Connection Size	Horsepower	Weight (kg)
9021501	9021502	9021503	EPH200	2" / 63mm 2.5" / 75mm	2.0hp	23.0
9021504	9021505	9021506	EPH300	2" / 63mm 2.5" / 75mm	3.0hp	24.0
9021507	9021508	9021509	EPH400	2" / 63mm 2.5" / 75mm	4.0hp	25.0

Product Dimensions

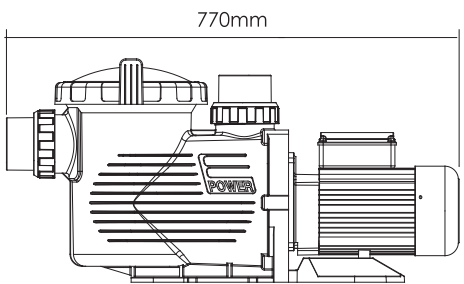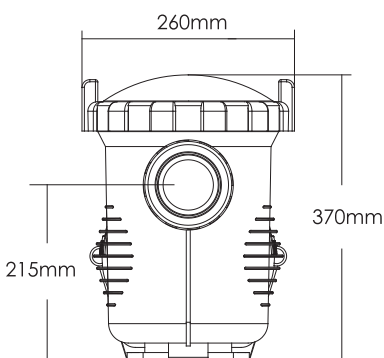

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: 2/F, Lockhart Centre, No. 301-307 Lockhart Road,
Wanchai, Hong Kong

PHONE +852 2832 9880

www.emauxgroup.com



YOUR PREMIER SUPPLIER

Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
© EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.

www.emauxgroup.com