




SSCnano+

INSTALLATION AND OPERATION MANUAL

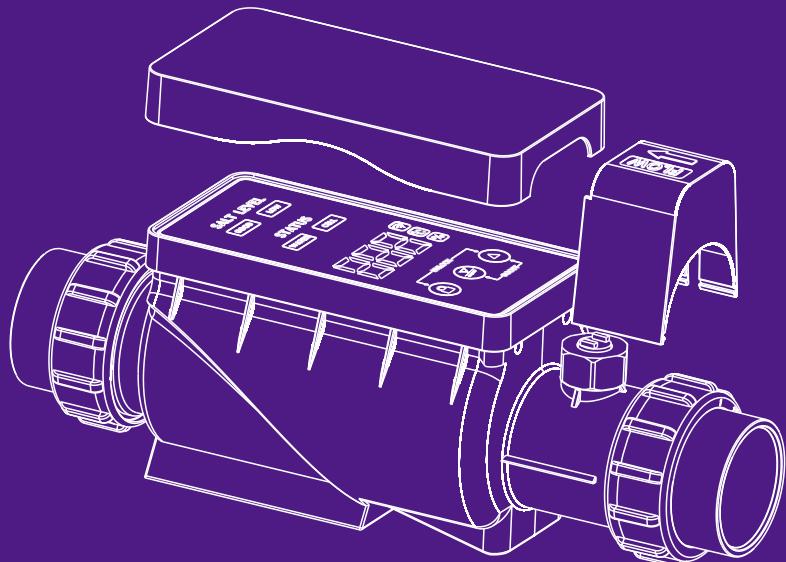

USER MANUAL



RoHS
DIRECTIVE
2011/65/EU

IPX4

Models: **SSCnano+20**
SSCnano+30
SSCnano+40

TABLE OF CONTENTS

Section		Page
IN THE BOX	check list	2
SAFETY INFORMATION	safety and warnings	3
INTRODUCTION	introduction specifications dimensions	4
INSTALLATION	connecting to filtration system	5
FEATURES	control panel and functions	6
OPERATION	set up and chlorine production IoT Connectivity	7
SALT	calculating salt. salt type. adding salt	13
MAINTENANCE	inspecting the cell cleaning the cell	14
TROUBLE SHOOTING	issues and solutions	15
PARTS LIST	replacement parts	16
WARRANTY	product details	17
NOTES	space for notes	18

IN THE BOX

Welcome, and thank you for purchasing a high quality product from Emaux.

Please check the contents of the box and read completely through this manual before starting any installations.



Item	Description	Check
1	Main unit (includes 1, 2, 3, and 7)	
2	Transparent control panel cover	
3	Flow switch cover	
4	Flow switch (under the flow switch cover, see parts list item 3)	
5	Unions included (for glueing): 2 x GB63 Pipe Fittings and 2 x 2" Pipe Fittings.	
6	Union nut x 2	
7	O-ring x 2 (inside unions, see parts list item 6)	
8	Divertor (inside chlorinator, see parts list item 7)	
9	Power supply and cables	
10	This user manual	
11	Plug kit	

SAFETY INFORMATION



WARNING:

This product should be installed and repaired by a technician who is qualified in the installation and maintenance of indoor pool/spa products. Please read this manual before installing the product. The instructions in this manual can be followed exactly. Disconnect electrical power before removing the cover for servicing unit. Replace all screws and covers before reconnecting the unit to electric power. Incorrect installation and/or operation can cause serious injury, property damage, or death. To reduce the risk of injury, do not permit children to use this product. Improper installation and/or operation will void the warranty.

IMPORTANT SAFETY INSTRUCTIONS

When installing and using this electrical equipment, basic safety precautions should always be followed,

including the following:

1) READ AND FOLLOW ALL INSTRUCTIONS.

2) WARNING - To reduce the risk of injury, do not permit children to use this product unless they are closely supervised at all times.

3) WARNING - Risk of Electric Shock. Connect only to a branch circuit protected by a ground-fault circuit-interrupter

(GFCI). Contact a qualified electrician if you cannot verify that the circuit is protected by a GFCI.

4) The unit must be connected only to a supply circuit that is protected by a ground-fault circuit-interrupter (GFCI). Such a GFCI should be provided by the installer and should be tested on a routine basis. To test the GFCI, push the test button. The GFCI should interrupt power. Push the reset button. Power should be restored. If the GFCI fails to operate in this manner, the GFCI is defective. If the GFCI interrupts power to the pump without the test button being pushed, a ground current is flowing, indicating the possibility of an electric shock. Do not use this pump. Disconnect the pump and have the problem corrected by a qualified service representative before using.

SJ Do not bury cord. Locate cord to minimize abuse from lawn mowers, hedge trimmers, and other equipment.

6) WARNING - To reduce the risk of electric shock, replace damaged cord immediately.

7) WARNING - To reduce the risk of electric shock, do not use extension cord to connect unit to electric supply; provide a properly located outlet.

8) Mounting location of the supply unit at least 1.5 m from the pool.

9) Proper disassembly and reassembly of the cell for cleaning.

10) Do not energize or operate the unit if the cell housing is damaged or improperly assembled.

11) The unit installation position should be at least 1.5m away from the swimming pool.

12) This appliance is not intended for use by persons (including children) with reduced physical, sensory or

mental capabilities, or lack of experience and knowledge, unless they have been given supervision or

instruction concerning use of the appliance by a person responsible for their safety.

13) Children should be supervised to ensure that they do not play with the appliance. Children shall not play with the appliance.

14) This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved

15) Cleaning and user maintenance shall not be made by children without supervision.

INTRODUCTION

The SSCnano+ is an innovative in-line salt chlorinator that seamlessly synchronizes with the pump. Offering 12 chlorine production modes, it provides complete control over the chlorination process. Integrated features like a water flow switch, salinity monitoring, and water temperature tracking enable responsive pool management. Enjoy the benefits of long cell life and reduced chemical usage, thanks to its efficient and environmentally friendly design. Compact and user-friendly, SSCnano+ revolutionizes the experience of chlorine production.

Salt chlorination is a method of sanitizing swimming pools with chlorine generated by electrolysis. The electrolysis is achieved by passing the salt water solution through a weak electric charge in an electrolytic cell, which converts sodium chloride (salt) in the water into chlorine gas. The gas is dissolved in the water and becomes sodium hypochlorite (liquid chlorine).

SPECIFICATIONS and PARAMETERS

Code	Model	Power consumption	OUTPUT	Maximum Pool volume
9130059	SSCnano+20	120W	20 gram/hr	100m ³ / 24,000 gal. US
9130060	SSCnano+30	150W	30 gram/hr	140m ³ / 37,000 gal. US
9130061	SSCnano+40	200W	40 gram/hr	180m ³ / 47,500 gal. US

Power supply: 110-240V 50Hz/60Hz.

Minimum flow rate: 3m³/hr is required to activate the water flow switch. **Operating flow rate:** 3 to 10 m³/h

Salt level: 2800 to 4500 ppm

Operating temperature: 10 - 45°C

Maximum working pressure: 2.5bar

Cell Connections: 2.0" and 63mm unions (provided)

pH: For the chlorine produced by this equipment, the pH must be from 7.2 to 7.6




NOTE: A minimum flow rate of 3 m³/hr is required to activate the water flow switch.
Max. operation time:24h



The electricity supply circuit must be connected through a residual current device (RCD, RCCB) or Ground Fault Circuit Interrupter (GFCI) not exceeding 30 mA.

DIMENSIONS (mm)

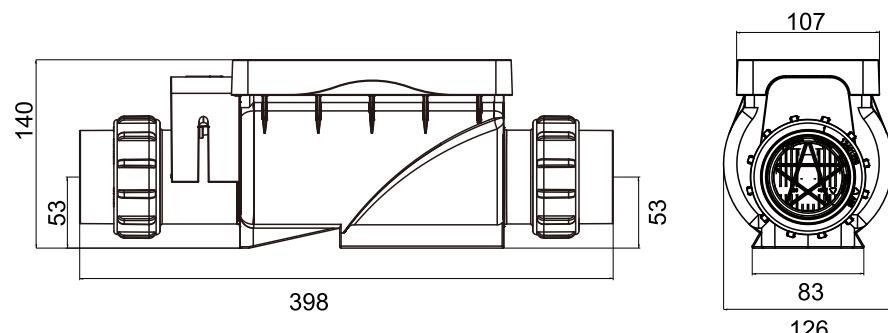


INSTALLATION

1. Manually chlorinate the pool with pool chlorine powder, granules, or tablets to the correct level (1 to 3ppm).
2. Add special pool salt to the pool (see section "salt") to approx. 2800-4500ppm.
3. Install the SSCnano+ in the correct water flow direction (there is an arrow on the body). Unions are provided for imperial 2" pipes and metric 63mm pipes. It is recommended to install the unit on a bypass with valves to isolate the unit for maintenance.


The unit is designed to operate on a water flow of 3 to 10 m³/h (790 to 2,600 US gal per hour). * If the flow rate is over 8 m³/h (2,100 US gal per hour) the unit must be installed on a bypass with a valve to limit the water flow.

4. After installation and set up, always continue to check the chlorine level regularly to adjust to the best setting to maintain the chlorine level for your pool.

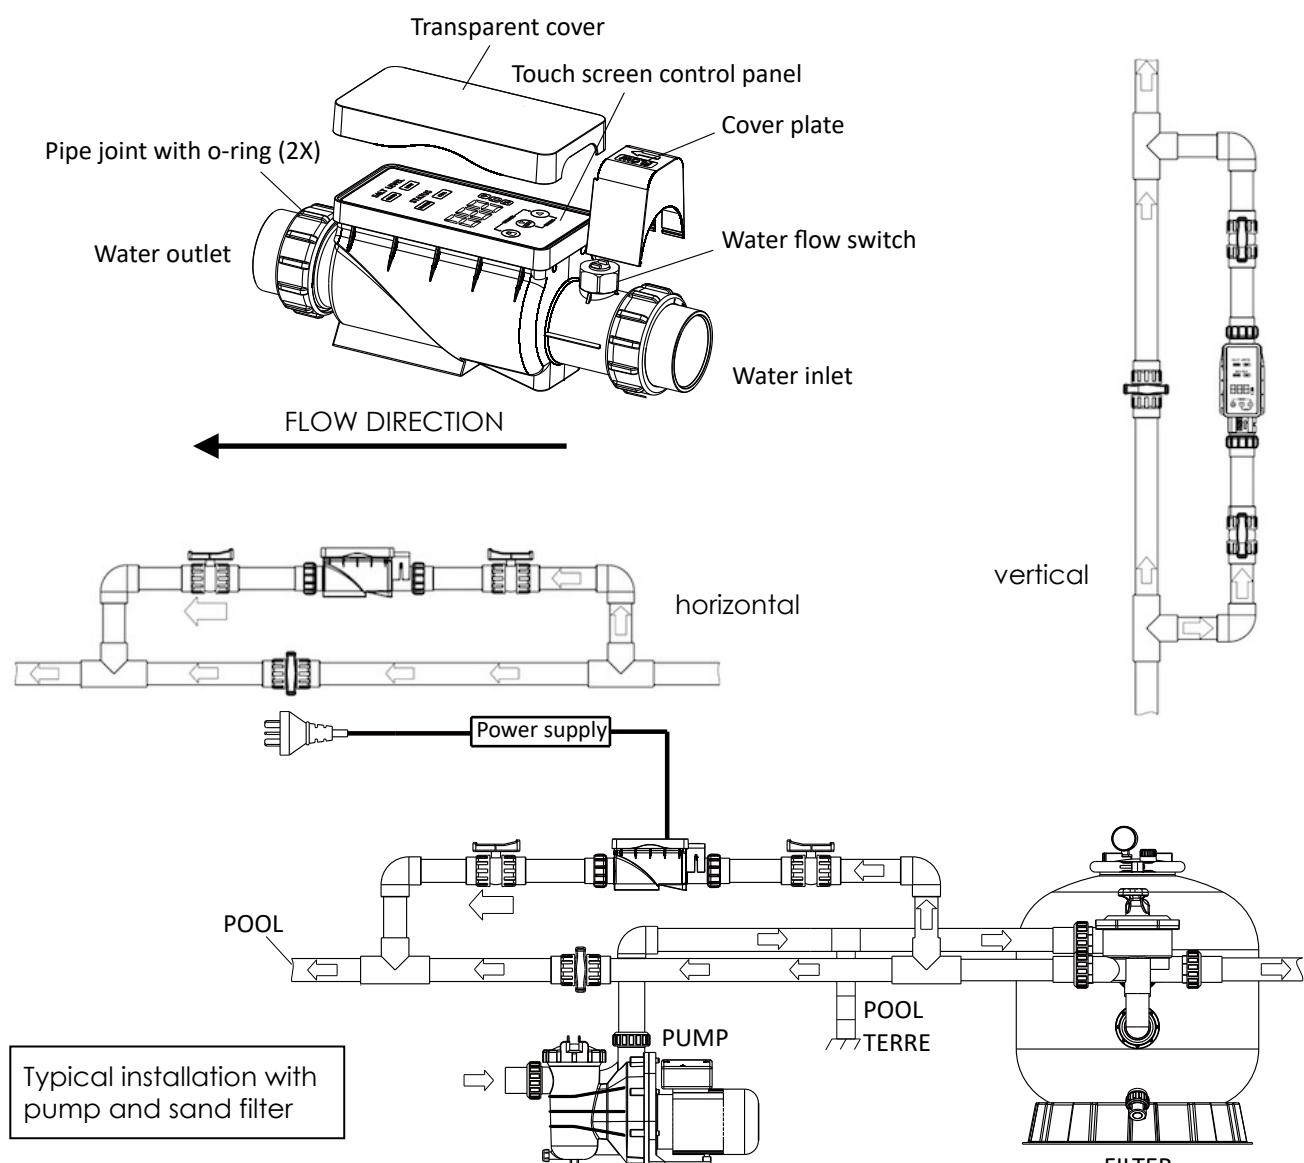

Install the flow switch cover


1. Snap the cover cap into the clips on both sides of the main body.
2. Slide the cover cap toward the transparent cover as far as it will go until its upper clips snap into the groove on the inside of the transparent cover.

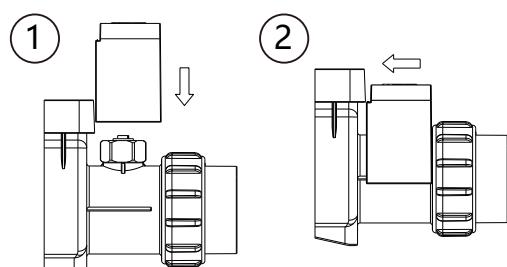

FEATURES

The touch-screen control panel provides easy access to all the features and functions of the SSCnano+.

An anti-accidental touch feature locks the panel functions after 60 seconds of inactivity. Refer to OPERATION for details.

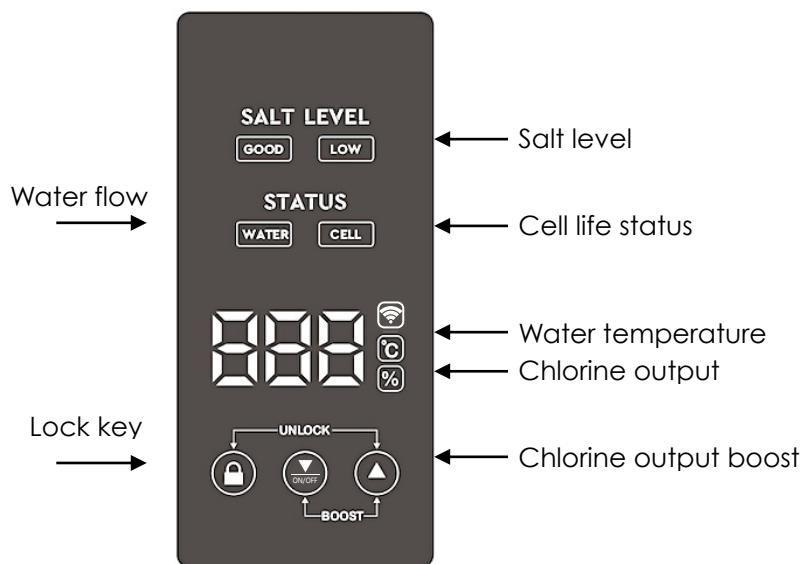

Water Flow Switch: The unit is designed to operate on a water flow of 3 to 10 m³/h. If the water flow is too low or the pump is not running, the water flow switch turns off the power supply to the chlorinator cell in order to protect the system from damage, overheating, or gas build-up. Chlorine will not be produced. Refer to OPERATION for indicator light functions.

WATER Light (Flow Switch Light): This light indicates water flow through the chamber of the inline salt chlorinator's titanium plates.

Red: Insufficient water is flowing through the in line salt chlorinator. No chlorine is being produced.
White: Sufficient water flow is present for chlorine production.

Temperature Sensor: if the pool water temperature drops below 10°C (+/-5°C) the temperature sensor turns off the power supply to the chlorinator cell in order to protect the system from damage and chlorine will not be produced. When the “°C” symbol is steadily lit, the digital display shows the actual water temperature. When the water temperature exceeds 10°C, the chlorinator will resume normal operation and the digital display will show the chlorine output percentage. Refer to OPERATION for indicator light details.

Salinity Sensor: The system is designed to operate on a salt concentration of 2800 to 4500 ppm (see table on p.8). Each time the salt chlorinator is turned on the outermost ring of the digital display scrolls to indicate the chlorinator is in analysis mode. After two minutes, the LED indicator will show one of four salinity ranges with an accuracy of +/-500 ppm. The Salinity Status Indicator Light checks the salinity daily and displays the salt level. Refer to OPERATION for details.

Salinity Status Indicator Lights: The inline salt chlorinator checks the pool water salinity daily and displays the level as follows:

GOOD Light White (Steady On): Salinity is good. Pool water salinity is between 2800 ppm and 4500 ppm.

GOOD Light White (Flashing): Salinity is above 4500 ppm. High salinity increases the risk of corrosion to pool equipment and damage to the titanium plates.

LOW Light White (Steady On): Low Salt. Salinity is below 2800 ppm. The in line salt chlorinator will produce chlorine at reduced efficiency.

Very Low Salt: If salinity drops below 2000 ppm, the in line salt chlorinator will not produce chlorine. The digital display will flash "ER1" in white light.

CELL Light: This indicator displays the status of the chlorinator's titanium plates which occasionally require inspection. Calcium scaling may be present on the titanium plates. Chlorine will not be produced.

White (Flashing): The inline salt chlorinator requires inspection. Calcium scaling may be present on the titanium plates. Chlorine will not be produced.

White (Steady On): The inline salt chlorinator is functioning well and producing chlorine.

Off (No Light): The inline salt chlorinator is off and not producing chlorine. It may be in the nonelectrolysis period of a sanitizing cycle and will resume shortly.

WATER Light: When White, this light indicates water flow through the titanium plates and that the flow rate is sufficient for chlorine production. A red light indicates that the water flow is too low for chlorine production. Refer to OPERATION for details.

Self-cleaning function: Automatic polarity reversal every 8 hours helps to prevent the build up of limescale (calcium) on the titanium plates. If power is interrupted, the counter stores its state. In BOOST mode, polarity reversal also occurs every 8 hours. The switch between "+" and "-" poles takes 1-2 minutes.

BOOST Mode: If the chlorine level is low, this feature can set the electrolysis output to run continuously for the next 24 hours of pool pump operation.

Memory Function (Memory Mode): The SSCnano+ is equipped with an automatic memory function, requiring no key combinations or manual intervention. This design allows the SSCnano+ to be connected to an automation system (the main power supply of the unit can be connected to an automated system).

Parameter memory

With each setting adjustment, the unit automatically records the selected electrolysis mode. Any new modification replaces the previous setting; only the last configured electrolysis mode is retained. Behavior in the event of shutdown or power failure.

In the event of the unit being switched off or a power supply interruption, the SSCnano+ automatically restarts.

Once power is restored. Chlorine production automatically resumes, continuing exactly from the point at which operation was interrupted, with all parameters retained.

Display

The mode displayed on the screen always corresponds to the last recorded electrolysis mode.


OPERATION

Turning off the device:

The power is turned on and the device is activated. Press and hold the "▼" key for 5 seconds to shut down the device; press and hold the "▼" key for 5 seconds again to turn it on.

An anti-accidental touch: After 60 seconds of inactivity, the auto-lock button lights up the lock  button, placing the screen in the locked state, with red light displayed. To UNLOCK, press and hold both  and  simultaneously. After unlocking, new operations can be carried out. After unlocking, the  button shows white light.

Pressing the  lock key advances through the status displays. Pressing the  up and down  keys adjusts the chlorine production and boost settings.



Temperature: Press the  key until the white °C symbol is on and shows the water temperature.

Salinity: Press the  lock key until the °C and % symbols are off.

Service Life of the Cell: Press and hold both  and  for 20 seconds, and the display will show the cumulative electrolysis duration. It will return to normal after 10 seconds of display.

When the digital display shows 000, the electrolysis duration is within 100 hours; when it displays 001, the electrolysis duration is within 100–200 hours (exclusive); when it displays 002, the electrolysis duration is within 200–300 hours (exclusive); when it displays 100, the electrolysis duration is within 10,000–10,100 hours (exclusive). Check the corresponding duration accordingly.

Chlorine production (electrolysis): On startup the electrolysis output is displayed first and the white % symbol is illuminated. After displaying other values, press the  lock key 3 times to return to the rate of chlorine production. The digital display shows the chlorine production in a percentage of time. Increments from 2% to 10% are 2%. Increments from 20% to 100% are 20%.

The  button increases the output in 2% increments up to 10%, then in 20% increments.

Example: If the display shows 8%, pressing  once shows "010" and the unit will produce chlorine at the new 10% output percentage. Pressing  again shows "020" for 20%, and so on up to "100".

Display States and chlorine production times

Mode	Value	Display	Chlorine production
1	0%	none	none
2	2%	Steady "002"	75 seconds per hour
3	4%	Steady "004"	150 seconds per hour
4	6%	Steady "006"	16 seconds every 5 minutes
5	8%	Steady "008"	22 seconds every 5 minutes
6	10%	Steady "010"	30 seconds every 5 minutes
7	20%	Steady "020"	55 seconds every 5 minutes
8	40%	Steady "040"	105 seconds every 5 minutes
9	60%	Steady "060"	160 seconds every 5 minutes
10	80%	Steady "080"	215 seconds every 5 minutes
11	100%	Steady "100"	265 seconds every 5 minutes
12	100%	Flashing "100"	BOOST Mode. continuous for 24 hours

BOOST Mode: If the chlorine level is low, this feature can set the electrolysis output to run continuously for the next 24 hours of pool pump operation after which the unit will revert to its preselected output. The 24 hours is synchronised with the pump running time.

To activate the boost press and hold both  and  buttons simultaneously.

To deactivate the boost press and hold both  and  buttons simultaneously a second time.

Manually canceled: Unit reverts to the electrolysis mode active before BOOST was started.

Connectivity Specification

IEEE 802.11b/g/n.

Channels 1 to 14 at 2.4 GHz.

Supports WEP, WPA/WPA2, WPA/WPA2 PSK (AES), and WPA3 security modes.

The maximum output power is +18 dBm for 802.11b transmission.

Supports STA, AP, and STA + AP combo working modes.

Mobile App : Smart Life

Smart Life app allows users to control SSCnano+ outside the home network through their mobile phones. Please follow the instructions below to complete the Smart Life App installation, and set up and operate the SSCnano+.

App installation

Search "Smart Life – Smart Living" in Google Play Store(Android) or AppStore (Apple iOS) to download the App for your mobile phone

Android (Play Store)	iOS (AppStore)
 Smart Life - Smart Living Volcano Technology Limited In-app purchases	 Smart Life - Smart Living <small>Smart Living Volcano Technology Limited</small> #30 in Lifestyle 4.5+ 1.7M Ratings Free - Offers In-App Purchases

App setup

Check this link for more information about the Smart Life app that including installation the app, account management, scene function, manage homes and more.

<https://developer.tuya.com/en/docs/iot/user-manual-for-tuya-smart-v3177?id=K9obrofrfk4sk> or you can scan this QR code to visit the web site.




App setup

Check this link for more information about the Smart Life app that including installation the app, account management, scene function, manage homes and more.

<https://developer.tuya.com/en/docs/iot/user-manual-for-tuya-smart-v3177?id=K9obrofrfk4sk> or you can scan this QR code to visit the web site.

Complete the following steps based on Tuya Technical support site.

1. Download and install the Smart Life app on the mobile phone
2. Register the account for Smart Life app, you can enter a mobile phone number or email address, agree on the User Agreement, Privacy Policy, and Third-Party Information Sharing List, and then tap Get Verification Code.
3. Enter the returned verification code to navigate to the password setting page. Set a password as required and tap Done.
4. Open the app. If you have registered an account of the app, tap Log In to go to the login page.
5. Enter the registered mobile phone number or email address and password and tap Log In.

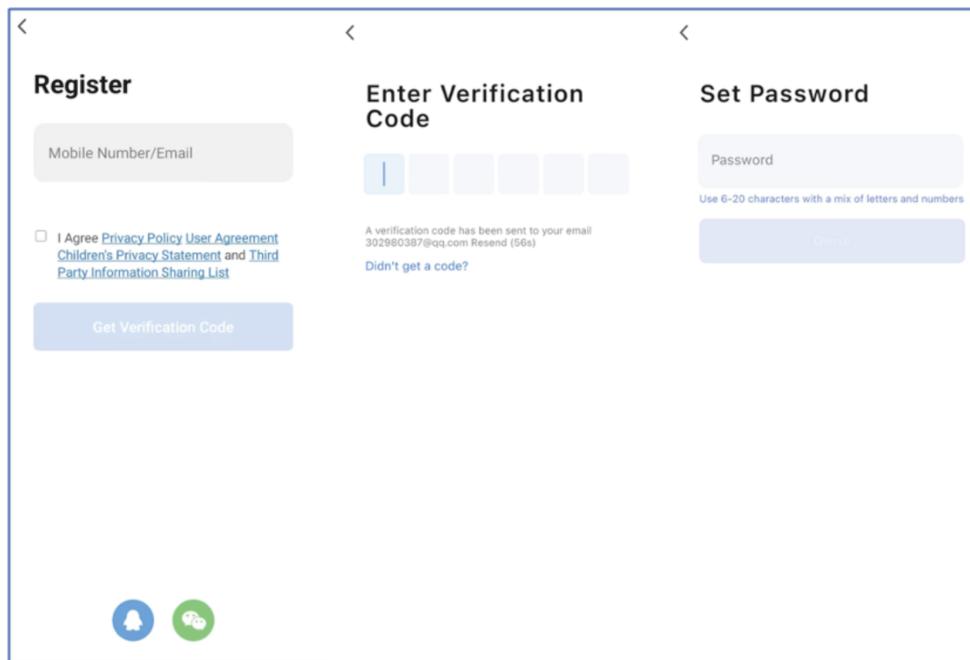

After the Smart Life app is installed and registered the account in your mobile phone, we can start connect the SSCnano+ to Wi-Fi network.

Connect your SSCnano+ to your Wi-Fi network

Remark: The connected router must have internet access.

Step 1) Enable the network configuration mode in SSCnano+ user interface


STEP	OPERATION DESCRIPTION	SCREENSHOTS (FOR COMPLETED STEPS)
1	Power ON the SSCnano+ After powering on, the salt unit will perform a two-minute analysis, during which the three-digit display will scroll around the outer ring.	

	<p>2 After the analysis has completed, press and hold all three buttons again until the Wi-Fi icon flashes rapidly. The SSCnano+ entered the network configuration mode.</p>	
--	--	--


Open the Smart Life app and click “Add device” in the app

Remark: Make sure the previous steps (Network Configuration of SSCnano+) are completed.


Step 2) Pair the SSCnano+ with the mobile phone

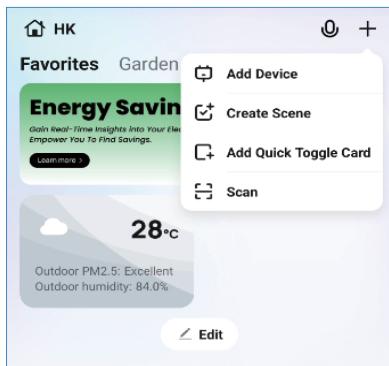


1) CLICK “ADD DEVICE”

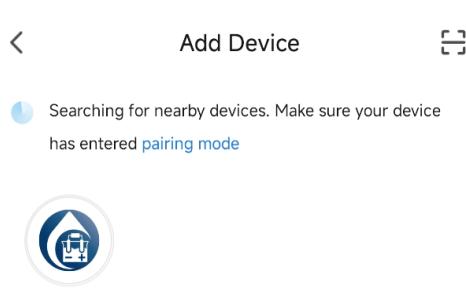

2) SELECT SSCNANO+ ICON

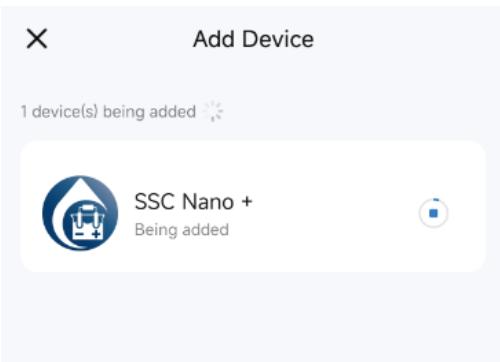


3) SELECT YOUR TARGET WI-FI NETWORK AND INPUT PASSWORD

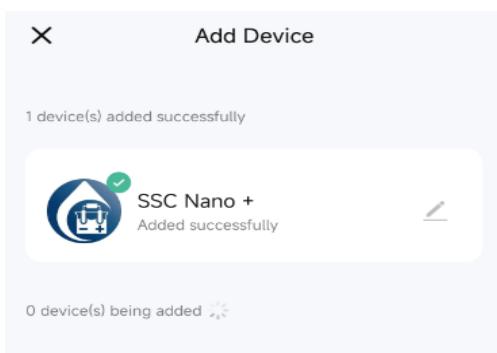

5) DEVICE IS SETUP IN SUCCESS



4) WAIT UNTIL THE SETUP IS FINISHED

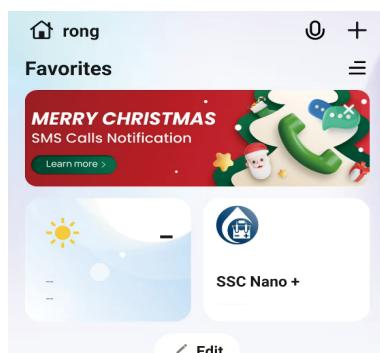

6) DONE

Application interface

The user interface can do all the SSCnano+ setting and programming as the control panel on the SSCnano+, along with status display. It easy and comprehensive to use.

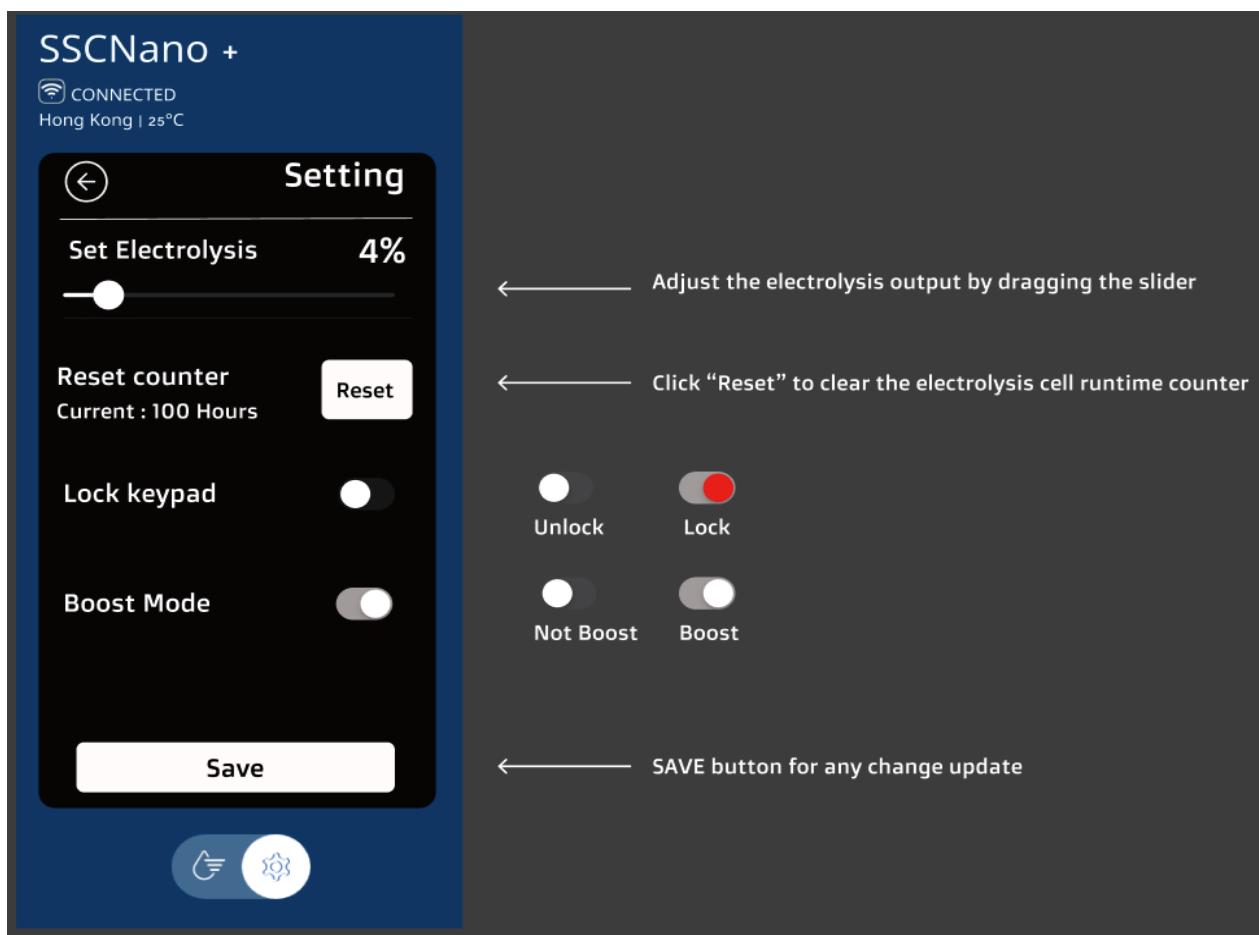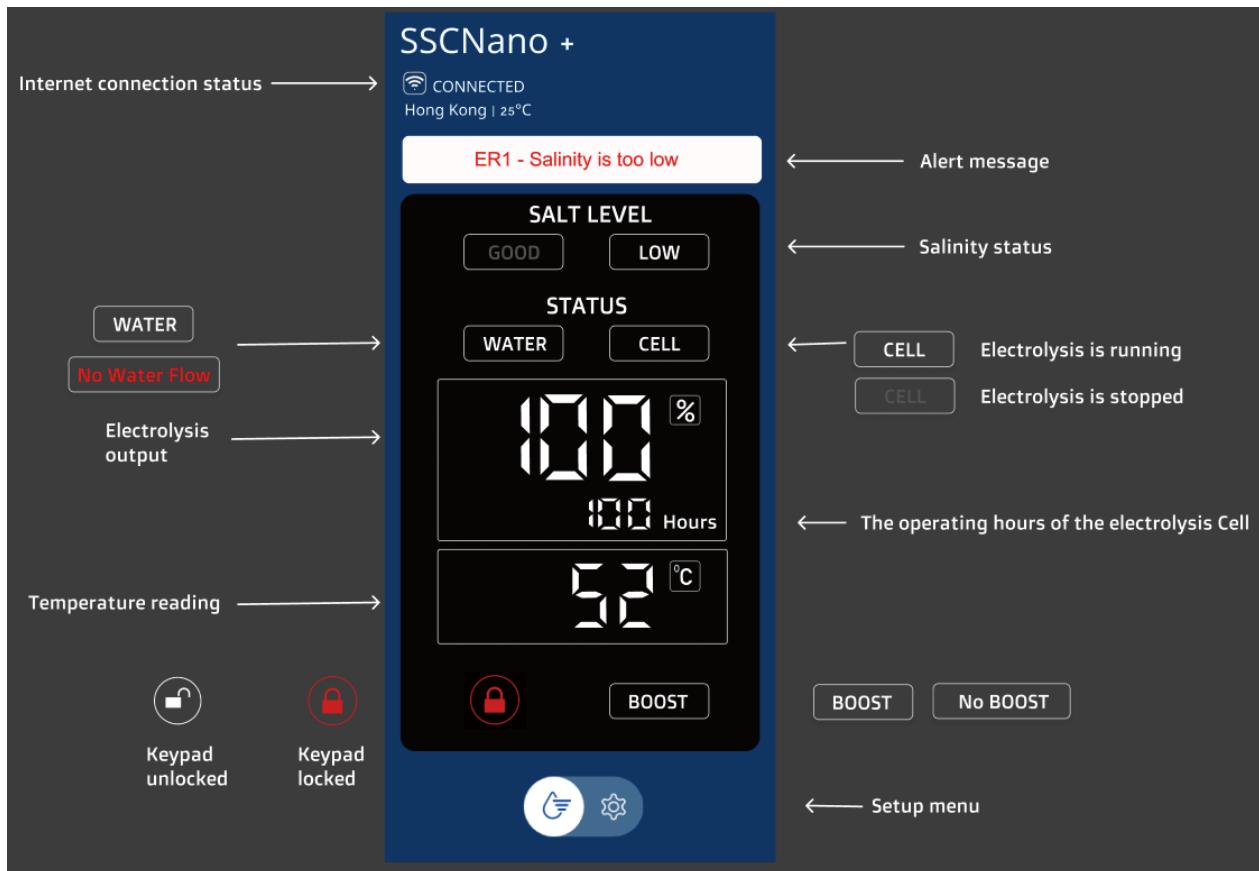

SALT

ADDING SALT TO THE POOL WATER

The amount of salt required is between 2800 to 4500 ppm. The recommended salt level required in a new or refilled pool is 3500 ppm.

- Turn the pump off. Do not restart the pump until all the salt is dissolved.
- Add the salt directly into the pool evenly around the pool. Do not allow the salt to sit in a pile on the floor of the pool.
- Do not add large amounts of salt near the skimmer or near the main drain or spa suction drains, it will block the pipes or damage the pump.
- Wait several hours until the salt has dissolved.
- Run the filtration system for 24 hours.
- The only way to remove excess salt in the pool water is to partially drain the pool and refill with fresh water.

Overflow pools: be sure to include the volume of the balance tank.

Typical salt quantity for 4000 ppm

Volume m ³	Salt kg	Volume Gall US	Salt pounds
10	40	2,642	88
15	60	3,963	132
20	80	5,283	176
25	100	6,604	220
30	120	7,925	264
35	140	9,246	308
40	160	10,567	352
50	200	13,209	440
60	240	15,850	528
70	280	18,492	616
80	320	21,134	704
90	360	23,775	792
100	400	26,417	880

Salt is not lost through evaporation. Much of the hypochlorous acid returns to salt after disinfection, but not all of it, and some is lost through:

- Backwashing, splash-out, and heavy rain
- UV sunlight breaking down chlorine into gases that escape from the pool
- Bather load: sweat, urine, and cosmetics consume chlorine, creating non-recoverable by-products

Occasional topping up is therefore required.

TYPE OF SALT

Only use salt that is specially refined for use in pools. Obtain pool salt from your pool dealer.



Do NOT use these types of salt:

Salt with additives or impurities and food grade salt will cause early cell failure.

1. Rock salt.
2. Salt with more than 1% yellow prussiate of soda
3. Salt with more than 1% of anti-caking additives
4. Iodized salt
5. Supermarket or catering food grade salt

MAINTENANCE

The salt cell has a life of around 8,000 hours (approx. 1,000 to 1,300 days) depending on the chlorine output settings and filtration time.

Visually inspect the condition of the cell at least once a year or more often if there are signs of reduced chlorine production:

Inspection: Turn off the filtration system. Unplug the power supply cable. Remove the main body assembly of the SSChano+ chlorinator and look inside. If white calcium deposits are present on the titanium plates, the cell must be cleaned.

CLEANING THE TITANIUM SALT CELL



Wear protective clothing

You need:

- Proprietary cell cleaning fluid from your pool store
or
- diluted hydrochloric (muriatic) acid (always add acid to water)
or
- a dilute solution of pHminus (sodium bisulfate)




We recommend using a salt cell cleaner from your pool shop or dissolved pHminus rather than diluted hydrochloric (muriatic) acid; it is a safer alternative and is not harmful to you or the salt cell.

Instructions

1. With the main body removed, seal one end with a plug.
2. Fill approximately one-third of the cavity with the acid solution, then seal the other end.
3. Shake vigorously and leave to stand for 10 to 15 minutes for the limescale (calcium) to be fully dissolved by the cleaning fluid or acid. For thicker calcium deposits, repeat the action. If deposits remain after softening with the acid solution, use plastic or wooden strips to scrape them off.
* Do not touch the titanium blades with anything made of metal.
4. Once the salt cell is clean, dispose of the cleaning mixture and rinse the cell with fresh water.
5. Reassemble the chlorinator in the water pipes and tighten the collars.
6. Reconnect the cell cable to the power supply unit.
7. Turn the system back to automatic setting or timer and check all functions.

TROUBLESHOOTING


Regular pool chemistry testing and maintenance along with correct electricity supply are essential for trouble free operation of salt water chlorinators.

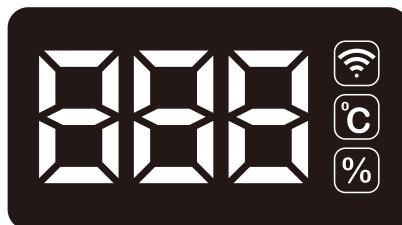

Display	Description	Solution
Er1	Salinity has dropped below 2000 ppm or no water flow.	Salinity must be 2800 to 4500 ppm. Add salt, the chlorinator should operate normally. Check water flow.
Er2	Water temperature is below 10°C, or the temperature sensor may be defective	Raise water temperature to 10°C-45°C. If the 'Er2' display persists, contact customer support.
Er3	Current from power unit exceeds the limit	Replace power unit. If display does not turn on, contact customer support.
Er4	Abnormal voltage	Check all connections and household electricity supply
Er5	Main electronic board temperature is too high.	Shut down and wait for the temperature to decrease.
Er6	At over 52°C the chlorinator turns off to protect the system	Electrolysis will resume when temperature
CELL light flashing	Possible calcium scaling on the titanium plates. Water hardness over 400 ppm.	Inspect the cell. Clean the cell. See MAINTENANCE. Test water calcium hardness
CELL light off	Programmed cycle is 'off', possibly because a cycle is complete, or the unit is reversing its polarity.	Wait for one cycle to complete. Adjust output as required
'LOW' light on	Low salt. Salinity is below 2800 ppm.	Add more salt to at least 4500 ppm
'GOOD' light flashing	Salinity is above 4500 ppm.	Salinity is above 4500 ppm. Drain part of the water and top up with fresh water.
WATER light red	Insufficient water flow.	Check filter pressure (backwash filter or clean/change cartridge filter element). Check for blocked pipes or skimmers. Check valve settings. Check pump for leaks. Check the function of the flow switch.

Apart from cleaning the salt cell, there are no user servicable parts. If none of the above solutions are able to restart the production of chlorine, please contact customer support.

PARTS LIST

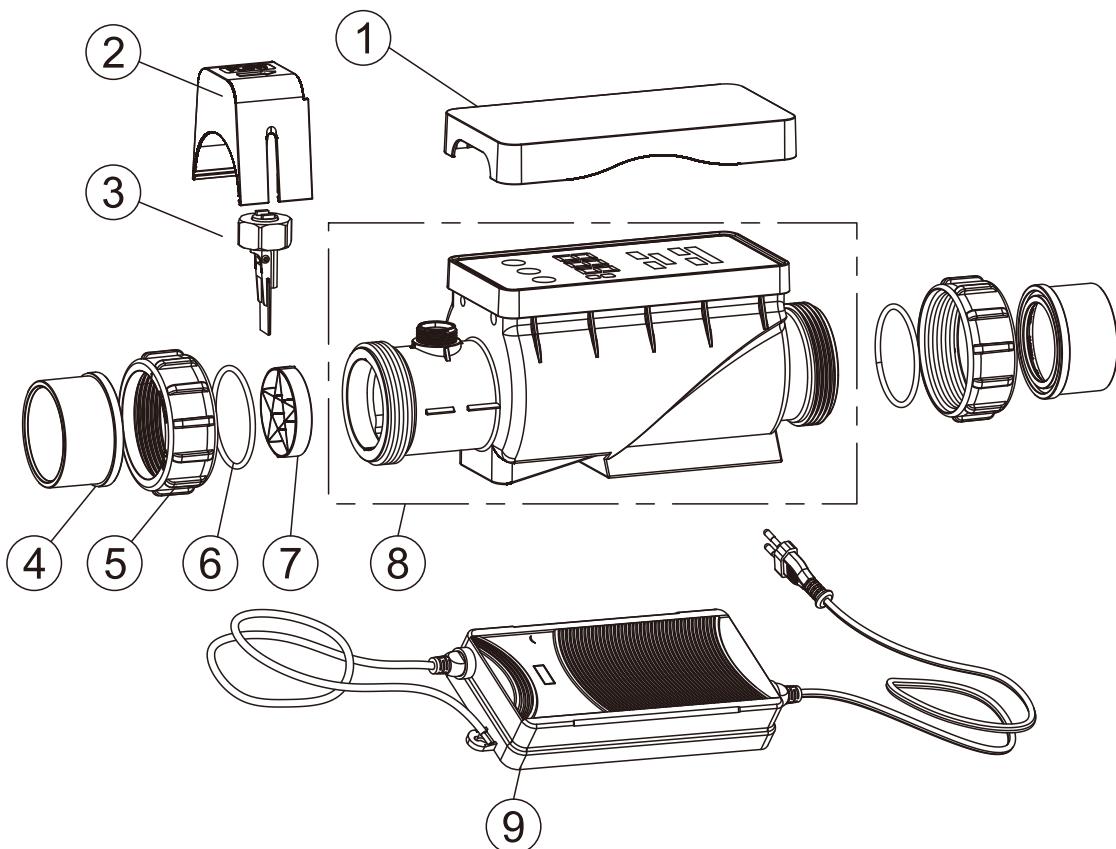

Item	Part No.	Description	Qty
1	12405029	Transparent cover	1
2	12433030	Flow switch cap	1
3	50903056	Flow switch FS-SW320	1
4	12435085	GB63 pipe union	2
4	12435084	2" pipe union	2
5	12401298	union nut	2
6	51504281	O-ring d60x3.5	2
7	10416002	Diverter valve	1
8	12440111	Main unit 20 gr/hr SSCnan0+ 20	1
	12440112	Main unit 30 gr/hr SSCnan0+ 30	1
	12440113	Main unit 40 gr/hr SSCnan0+ 40	1
9	50928016	Power supply 20 gr/hr GM130-1760700-2DG	1
	50928017	Power supply 30 gr/hr GM152-2500600-2DG	1
	50928018	Power supply 30 gr/hr GM259-2900700-2DG	1

WARRANTY

As the original purchaser of the equipment purchased through an authorized international distributor or dealer, Emaux Water Technology Co. Ltd. warrants its products to be free from defects in materials and workmanship under normal use during the warranty period. The warranty period begins on the date of purchase and extends only to the original purchaser. It is not transferable to any subsequent purchaser. All expendable parts are excluded.

During the warranty period, an Emaux authorized reseller will repair or replace defective parts with new parts or, at the option of Emaux, serviceable used parts that are equivalent or superior in performance to new parts. This Limited Warranty applies only to products purchased from Emaux authorized resellers. This Limited Warranty does not apply to any product that has been damaged or rendered defective:

- (a) as a result of accident, misuse, or abuse;
- (b) as a consequence of a force majeure event;
- (c) by operation outside the usage parameters stated herein;
- (d) by the use of parts not manufactured or sold by Emaux;
- (e) by modification of the product;
- (f) as a result of war or terrorist attack; or
- (g) as a result of service by anyone other than an Emaux authorized reseller or authorized agent.

EXCEPT AS EXPRESSLY SET FORTH IN THIS WARRANTY, EMAUX MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. EMAUX EXPRESSLY DISCLAIMS ALL WARRANTIES NOT STATED IN THIS LIMITED WARRANTY. ANY IMPLIED WARRANTIES THAT MAY BE IMPOSED BY LAW ARE LIMITED TO THE TERMS OF THIS EXPRESS LIMITED WARRANTY.

You will need this information if you require service for your product

PRODUCT	
MODEL	
SERIAL NUMBER	
DATE OF PURCHASE	
DEALER	

NOTES

Make notes of your settings or keep a log of your maintenance schedules.

EMAUX WATER TECHNOLOGY CO., LTD
2/F, Lockhart Centre, No. 301-307 Lockhart Road,
Wanchai, Hong Kong
Phone +852 2832 9880

 **YOUR PREMIER SUPPLIER**

www.emauxgroup.com