



VALUE FOR TRUSTED PERFORMANCE

FOR THE MEDIUM SIZE
RESIDENTIAL POOLS



E-Force Pump



VALUE FOR TRUSTED PERFORMANCE


The E-Force pump operates quietly and is highly energy-efficient. Its 2-inch suction enhancement boosts performance. Featuring a unique ring lock nut design, it is easy to maintain. With low decibel levels and minimal energy consumption, it requires very little upkeep.




PRODUCT FEATURE

1. 1.5 & 2 inch suction and discharge port with transparent lid
2. Asynchronous, Two poles motor
3. Class insulation: 130(B)
4. IPX5 Waterproof standard
5. Built-in thermal protection
6. Overload protection
7. External heat sink
8. Available in 50Hz or 60Hz with 220V/110V
9. Special design union compatible for both Imperial and Metric measurement standard
10. S.S. 316 Shaft
11. S.S. 316 Mechanical seal
12. Self-Priming up to 2m above water level
13. Testing Pressure 50PSI (3.5 Bar)
14. Basket Volume 2.5 litres

Product Information and Dimension

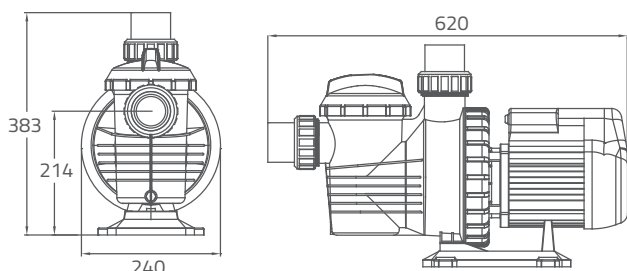

Code 220V/50Hz	Model	Horsepower	Weight(kg)	Capacitance 220V
9023601	EF050	0.5hp	10.4	14μF
9023602	EF075	0.75hp	12.1	20μF
9023603	EF100	1.0hp	13.4	25μF
9023604	EF150	1.5hp	14.9	25μF
9023605	EF200	2.0hp	15.4	30μF

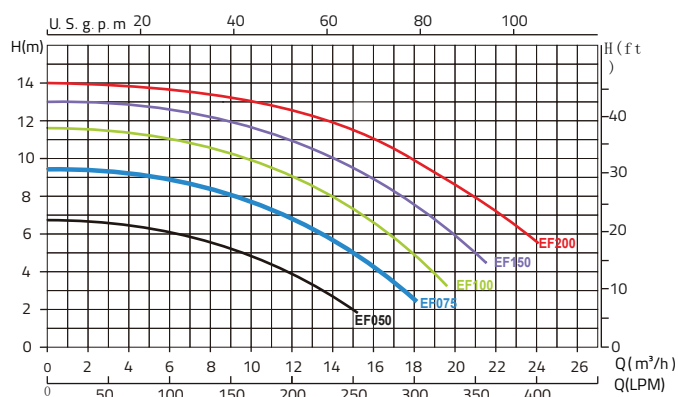

Code 220V/50Hz	Model	Input	Current (AMP)	Noise (dB)	Connection Size	Horsepower	Head (m)			
							4	6	8	10
							Flow Rate (m³/h)			
9023601	EF050	0.51	2.5	60	1.5"/50mm or 2"/63mm	0.5hp	12	6.8	--	--
9023602	EF075	0.75	3.5	68	1.5"/50mm or 2"/63mm	0.75hp	16.4	13.8	9	--
9023603	EF100	0.97	4.7	70	1.5"/50mm or 2"/63mm	1.0hp	19	17	14	10
9023604	EF150	1.30	5.9	70	1.5"/50mm or 2"/63mm	1.5hp	22	20	17.2	14
9023605	EF200	1.71	8.2	73	1.5"/50mm or 2"/63mm	2.0hp	26	23.2	21	18

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: 2/F, Lockhart Centre,
No. 301-307 Lockhart Road, Wanchai, Hong Kong
PHONE +852 2832 9880
www.emauxgroup.com

Pool & Spa Equipment

YOUR PREMIER SUPPLIER

Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
© EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.