



PARAMOUNT AND FLAWLESS QUALITY

GAC SERIES GEL-COAT FILTER

For residential and commercial pools



GAC900

GAC750

GAC600

GAC500

STRIKING AND RELIABLE

Emaux wide opening gelcoat filter is the perfect sand filter for all swimming pool enthusiast. The flawless gelcoat filter surface is not only eye catching but also corrosion resistant. The transparent wide filter lid provide an exceptional size to monitor and maintain the best filter condition. With the reliable and durable Emaux 6-way valve, this laminated filter is one the most sophisticated sand filter in the market.

Smart indicative pressure gauge

308mm wide opening diameter
for easy maintenance

Solid 30mm thick
transparent lid

Corrosive resistant
gelcoat layer

Reinforced fibreglass
inner layer

High performance
ABS lateral system

*Rechargeable LED
Inspection Light (Optional)*

6-Way Multiport Valve

GAC500 & GAC600
GB50 / 1.5" &
GAC750 & GAC900
GB63 / 2"
connection

½" water drain



ABS lateral system



**Solid 30mm thick
transparent lid**



**6-way valve with
multiple connection**



**Air Relief Valve
& Pressure Gauge Kit**



Tank Material
Gelcoat Fiberglass

Max Operating Pressure
36 psi / 2.5 bar


Max Temperature
43°C (109°F)

Suggested Size of Media
0.5-0.8mm



GAC Filter is equipped with :

1. 6-way multiport valve (1.5" for GAC500/GAC600, 2" for GAC750/900)
2. Universal standard of union connection
3. Pressure gauge
4. ABS Lateral system
5. Piping kit

Product Dimensions



Model: GAC750A, GAC900A

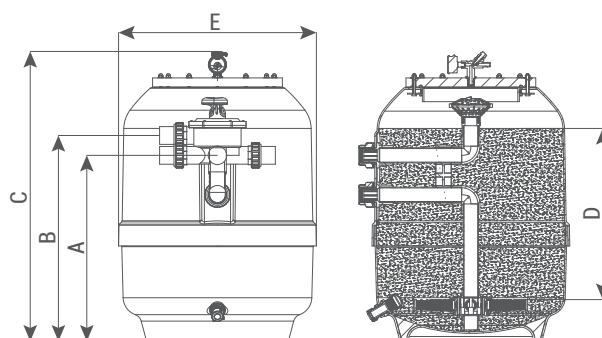

Model: GAC500, GAC600, GAC750, GAC900

Optional Accessories

Code	Description
40101026	Type-C charging LED light/ Battery capacity 4500mAh

Product Information

Model: GAC750A, GAC900A

Code	Model	Filter Area		Max Flow Rate			Sand		In / Outlet Connections		A	B	C	D	E	F
		ft²	m²	gpm	lpm	m³/h	lbs	kgs	GB (mm)	ANSI	mm	mm	mm	mm	mm	mm
9015705	GAC750A	4.7	0.44	97	367	22	1060	480	GB63	2"	750	890	1236	650	782	140
9015706	GAC900A	6.9	0.64	141	531	32	1655	750	GB63	2"	810	950	1334	725	922	140

Model: GAC500, GAC600, GAC750, GAC900

Code	Model	Filter Area		Max Flow Rate			Sand		In / Outlet Connections		A	B	C	D	E
		ft²	m²	gpm	lpm	m³/h	lbs	kgs	GB (mm)	ANSI	mm	mm	mm	mm	mm
9015704	GAC500	2.1	0.2	44	166	10	220	100	GB50	1.5"	497	560	822	310	526
9015701	GAC600	3	0.28	62	233	14	440	200	GB50	1.5"	590	653	920	420	627
9015702	GAC750	4.7	0.44	97	367	22	1060	480	GB63	2"	880	966	1236	650	782
9015703	GAC900	6.9	0.64	141	531	32	1655	750	GB63	2"	950	1036	1334	725	922



EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: 2/F, Lockhart Centre, No. 301-307 Lockhart Road,
Wanchai, Hong Kong

PHONE +852 2832 9880

www.emauxgroup.com

 **YOUR PREMIER SUPPLIER**