

Pump **SD SERIES** **ST SERIES**

QUIET OPERATION AND EASY INSTALLATION
For above-ground pools (SD Series) and portable spas (ST Series)



1. 1.5 inch suction and discharge ports
2. Asynchronous, two-pole motor
3. Motor Insulation Class B
4. IPX5 Waterproof
5. Built-in thermal protection
6. External heat sink
7. Transparent lid (SD Series)
8. Available in 50Hz or 60Hz for 230V/110V
9. Specially designed unions compatible for both Imperial and Metric standards
10. 316 stainless steel shaft
11. 316 stainless steel mechanical seal
12. Low noise level, low energy and easy maintenance

 **Emaux**
water technology



Pool & Spa Equipment



* only ST Series Pump is SAA certified

www.emauxgroup.com

SD SERIES PUMP

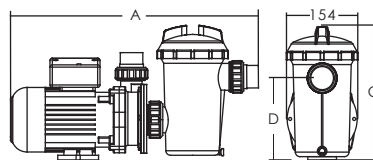
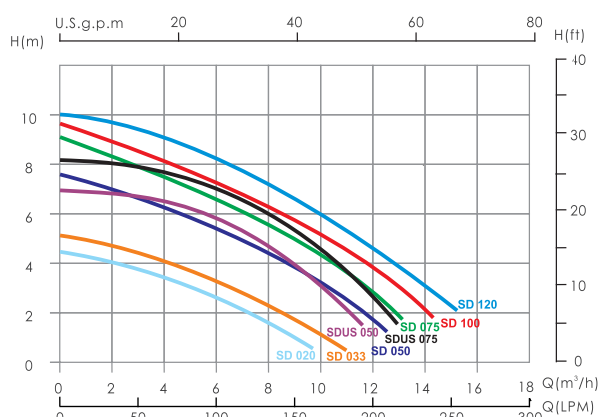


Model	Input (kW)	Current (AMP)	Noise (dB)	Head (m)			
				2	4	6	8
				Flow Rate (m³/h)			
SD020	0.28	1.5	55	7	2	--	--
SD033	0.43	2	55	8.4	4	--	--
SD050	0.60	2.5	60	11.5	9	4.6	--
SD075	0.75	3.5	60	13	10.2	7	2.8
SD100	0.90	4.7	65	14	10.8	8.6	4.4
SD120	0.97	5.8	65	15.2	13	10	6.4

Note: SDUS050, SDUS075 are for US market only

Code 230V/50Hz	Code 110V/60Hz	Code 115V/60Hz	Model	Connection Size	Horsepower	Weight (kg)	Capacitance 230V	Capacitance 110V	Capacitance 115V	A mm	C mm	D mm
9020202	9020201	/	SD020	1.5" / 50mm	0.2hp	6.2	5μF	20μF	/	510	278	167
9020203	9020209	/	SD033	1.5" / 50mm	0.33hp	6.5	6μF	24μF	/	510	278	167
9020204	/	/	SD050	1.5" / 50mm	0.5hp	8.0	8μF	/	/	555	291	173
9020205	/	/	SD075	1.5" / 50mm	0.75hp	9.0	14μF	/	/	555	291	173
9020206	/	/	SD100	1.5" / 50mm	1.0hp	9.1	20μF	/	/	555	291	173
9020207	/	/	SD120	1.5" / 50mm	1.2hp	11.0	20μF	/	/	555	291	173
/	/	9021301*	SDUS050	1.5" / 50mm	0.5hp	9.0	/	/	30μF	555	270	173
/	/	9021302*	SDUS075	1.5" / 50mm	0.75hp	10.0	/	/	30μF	555	270	173

ST SERIES PUMP

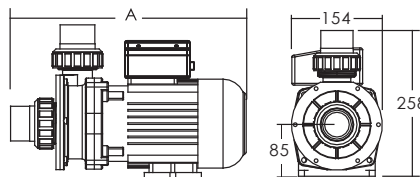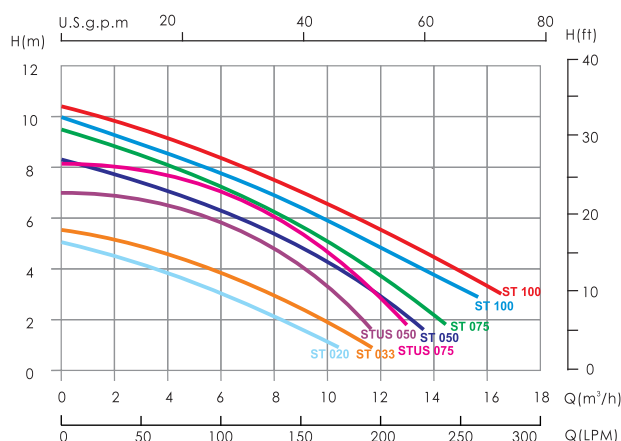

Model	Input (kW)	Current (AMP)	Noise (dB)	Head (m)			
				2	4	6	8
				Flow Rate (m ³ /h)			
ST020	0.28	1.5	55	8.2	3.2	--	--
ST033	0.43	2	55	9.8	5.2	--	--
ST050	0.55	2.5	60	13.2	10.3	6.6	1
ST075	0.75	3.5	60	14.4	11.3	8.6	4
ST100	0.90	4.7	65	17	13.6	9.8	5.1
ST120	0.97	5.8	65	18	14.8	11	6.8

Note: STUS050, STUS075 are for US market only

Code 230V/50Hz	Code 230V/60Hz	Model	Connection Size	Horsepower	Weight (kg)	Capacitance 230V	A mm
9020601	/	ST020	1.5" / 50mm	0.2hp	4.5	4μF	330
9020602	/	ST033	1.5" / 50mm	0.33hp	5.1	6μF	330
9020603	/	ST050	1.5" / 50mm	0.5hp	7.3	8μF	375
9020604	9020610	ST075	1.5" / 50mm	0.75hp	8.2	14μF	375
9020605	9020607	ST100	1.5" / 50mm	1.0hp	9.1	20μF	375
9020606	9020609	ST120	1.5" / 50mm	1.2hp	9.3	20μF	375

EMAUX WATER TECHNOLOGY CO., LTD

2/F, Lockhart Centre, No. 301-307 Lockhart Road,
Wanchai, Hong Kong

PHONE +852 2832 9880

www.emauxgroup.com

Pool & Spa Equipment

YOUR PREMIER SUPPLIER

Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
© EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.