

Heat Exchanger

HE SERIES

EXCELLENT HEAT TRANSFER CAPABILITY

Connects to different kinds of boilers, heat pumps and solar panel systems




Product Features


1. High quality acid-resistant AISI-316 stainless steel
2. Precision-welded outer jacket
3. Seamless pipes equipped with flow restrictors for high heat exchange capacity
4. Four size: 40, 60, 75, 120 kW, suitable for swimming pools of up to 450m³

 **Emaux**
water technology

Product Information

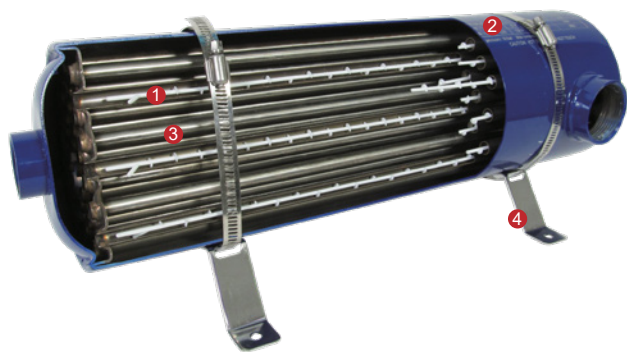

1. PP Baffle stick
2. SS AISI-316 stainless steel casing (Ø133x1.5mm)
3. SS AISI-316 stainless steel heat transfer tubes (Ø10x0.6mm)
4. SS AISI-316 stainless steel base

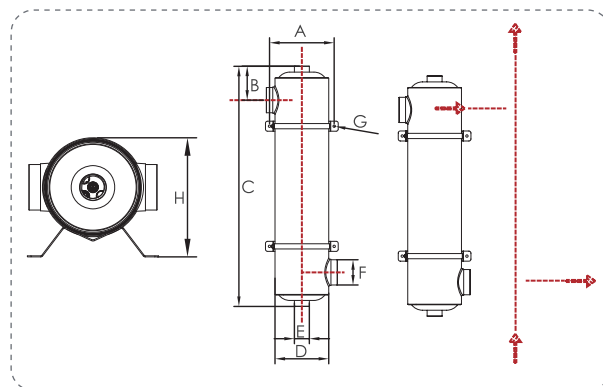


Testing Pressure

1. Pool Water Circuit: 5 Bar
2. Hot Water Circuit: 10 Bar

Product Dimensions and Technical Information

Code	Model	Capacity		Weight kg	Hot Water Flow (l/min)	Pool Water Flow (l/min)	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm
		kw	kBtu/h											
9170105	HE30	30	100	3.3	20	150	160	75	310	Ø133	1"	1.5"	Ø6	165mm
9170101	HE40	40	135	4.0	25	200	160	75	360	Ø133	1"	1.5"	Ø6	165mm
9170102	HE60	60	200	5.2	30	250	160	75	480	Ø133	1"	1.5"	Ø6	165mm
9170103	HE75	75	260	6.4	35	300	160	85	600	Ø133	1"	2"	Ø6	165mm
9170104	HE120	120	400	10.8	50	360	160	85	1070	Ø133	1.5"	2"	Ø6	165mm
9170106	HE200	200	680	16.2	100	500	160	85	1740	Ø133	1.5"	2"	Ø6	165mm

Installation

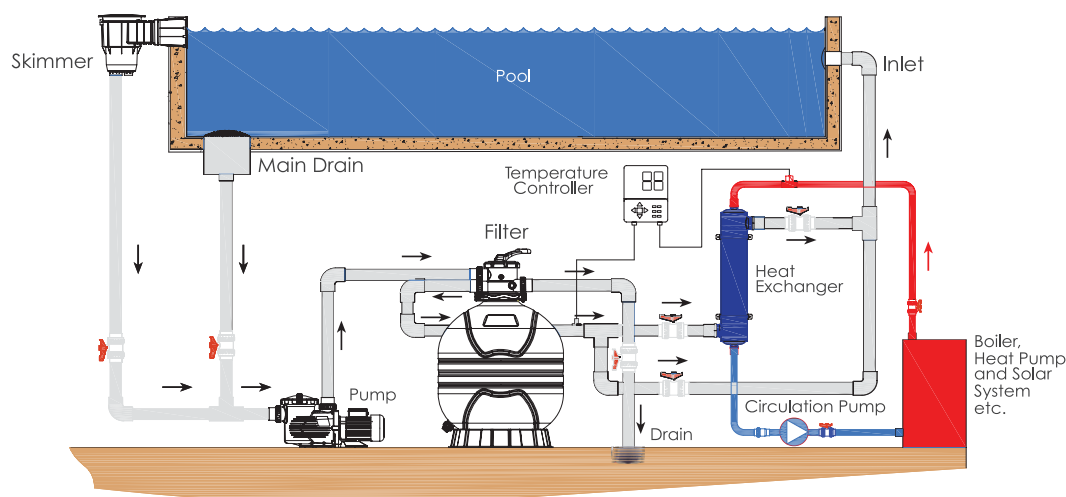

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: 2/F, Lockhart Centre, No. 301-307
Lockhart Road, Wanchai, Hong Kong
PHONE +852 2832 9880
www.emauxgroup.com

Pool & Spa Equipment

Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
© EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.

YOUR PREMIER SUPPLIER